

NEW

MULTICROSS 3D

18V MAX

WORLD PREMIERE

*Works with batteries of
7 well-known brands!*

WALL SCANNER

DRILL POINTER



Know where your drill will exit, even before you start drilling.

» 34

ELECTRICITY

AMPCLAMP 200



Measure voltage contactless thanks to the open clamp meter.

» 30



BOSCH

DEWALT

FESTOOL

HIKOKI

MAKITA

METABO

MILWAUKEE

MULTIBRAND BATTERY SYSTEM
MAXIMUM POWER · MAXIMUM SUSTAINABILITY



OUR STORY

FUTECH took off in 2009. At that time, Herwig Janssens already had 10 years of experience in the industry and had learned what users of construction lasers really needed on the job site. With this knowledge, he put together FUTECH's product range and chose red as the color for the devices. Not just any red, but Ferrari red.

Supported by Joeri Van den Acker and Piet van der Wee, sales immediately started at "full speed"! It's hard to imagine otherwise with such a color ;-).

The key to this quick success: three strategic choices.

- First, FUTECH stands for FUture TECHnology, a clear reference to "innovative products".
- Secondly, FUTECH products must be "Simple to choose, simple to use!" We like to keep it simple for the users.
- A solid service was the third strategic choice. We highly value both clear advice before the sale and a well-oiled after-sales service.

To this day, these three strategic choices still form the basis of FUTECH's growing success.

In 2014, Patrick WaÛters joined the team. Together with Herwig, he invested in the company, a broader product range, and growth through export. In addition to construction lasers, the range was expanded with distance meters, moisture meters, electrical meters, inspection cameras, thermometers...

The first participations in foreign trade fairs and visits to potential customers in different countries quickly led to the first FUTECH distribution points outside Belgium. Today, we are active in 19 countries. Naturally, we continue to work on being represented in even more countries.



FUTECH's continuous growth has been accelerated by several unique innovations over the years:

- FUTECH was the first manufacturer to launch a 3-line cross line laser.
- We launched the QUATTRO MM; the first receiver with millimeter indication compatible with all types of construction lasers: green or red, rotary or line.
- The Multicross 4D Electronic was the first model on the market with 2 horizontal lines, motor levelling, tilt protection, and a dual slope function. The user-friendly remote control made these advanced functions particularly easy.



"Our team gives everything for FUTECH. We are proud of what we have achieved together and continue to push hard every day to do even better."

- Patrick WaÛters



"FUTECH listens to its customers' questions. I aim to integrate the answers to those questions as best as possible into our new products."

- Herwig Janssens

- Our showpiece, the PROCROSS 8.0 DS, surprised everyone. FUTECH introduced the first construction laser perfect for both indoor and outdoor use. The first cross line laser to compete with rotary lasers. No one had ever succeeded in combining the needs for interior and exterior so well in one device.
- Recently, we launched a new product line designed by professionals, but fully aimed at DIY enthusiasts: FUTECH EASY.

On our 15th anniversary, FUTECH is once again pushing boundaries.

With the launch of the Multicross 3D 18VMAX FUTECH created a construction laser that works with the 18 Volt batteries of the 7 largest brands in the tool sector.

In addition to this durable and flexible battery solution, this device also features built-in fine adjustment, powerful laser diodes, and a USB-C connection for use on mains power.



At the first presentations to FUTECH dealers at home and abroad, the potential of this new device became very clear. The product launch set a new unprecedented record, even during the pre-sales phase.

Our ambition: to continue writing this success story of FUTECH in the future.

We are working on innovative products. We are strengthening our organization to grow and professionalize at the same time. We raise the bar for ourselves a little higher every day to keep surprising our customers with innovative products.

Thank you for 15 years of trust in FUTECH. Here's to many more years of "The pleasure to measure"!




SYMBOLS

	Accuracy
	Levelling
	Range with receiver (red lasers)
	Range with receiver (green lasers)
	Dust and water resistance
	Number of 90° angles (floor/ceiling)
	Vertical mode
	Tilt protection
	Scan function
	Wind function
	Fine adjustment of vertical lines
	Tripod thread
	Remote control
	Manual slope
	Electronic slope
	Digital slope
	Battery

MULTICROSS 3D/4D COMPACT **NEW**

The family with the strongest laser diodes and all conceivable advantages.

 2mm/10m	 Pendulum	 • 2x 120m	 • 2x 150m	 IP54	 4
 Tilt	 5°	 1/4" & 5/8"	 Li-Ion	 RF	 Manual

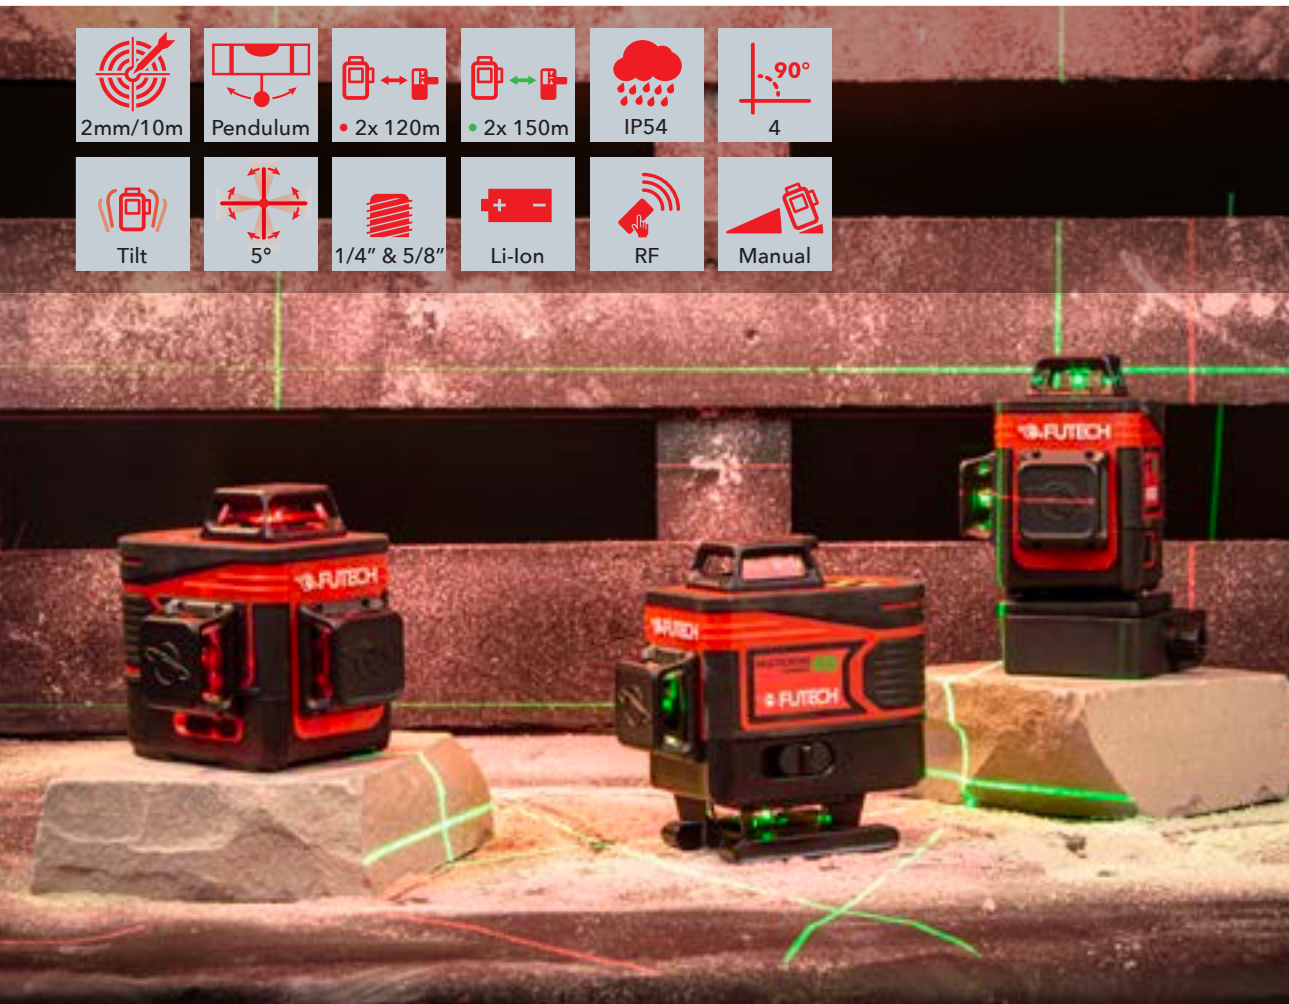




Extra visible laser diodes with an enormous range.



Fine adjustment rotates precisely around the intersection of the vertical lines.



Second battery for longer autonomy.



INCLUDED

H035.CAS	• 2X 180.30 • 2X 180.20	H035.TUR	130.15	H60033	2X H60028	H035.RCO


18V/MAX
MULTIBRAND BATTERY SYSTEM
 MAXIMUM POWER · MAXIMUM SUSTAINABILITY



Adapter for the 18V battery of 7 tool brands.

USB-C connector for use with mains power.

Fine adjustment rotates around the intersection of the vertical lines.



- BOSCH**
H036.BOS
- DEWALT**
H036.DEW
- FESTOOL**
H036.FES
- HIKOKI**
H036.HIK
- MAKITA**
H036.MAK
- METABO**
H036.MET
- MILWAUKEE**
H036.MIL

INCLUDED



Battery adapters sold separately

MULTICROSS 3D
 18VMAX **NEW**

The first construction laser that works with all your 18V batteries.




2mm/10m	Pendulum
2x 120m	IP54
4	6°
1/4" & 5/8"	Manual
18V	

MULTICROSS 3D BRAVE

Small device, great performance.



Also available in a set with a 160cm tripod and turntable.

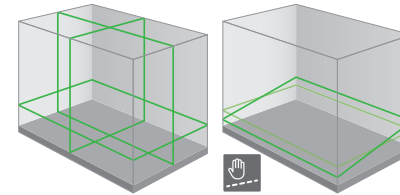

INCLUDED


↑ H028.POU ↓ H028.POS	180.20	180.40	130.15	H60033	H60028	H027.TUR (ONLY IN SET)	092.160 (ONLY IN SET)

MULTICROSS 3D FLOOR

13mm above the floor.



Also available in a set with a 160cm tripod.

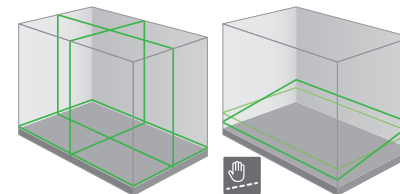

INCLUDED


↑ H028.POU ↓ H028.POS	180.20	180.40	130.12	H60022	H60024	H60030	092.160 (ONLY IN SET)

Second horizontal line 20mm above the ground.




Precise motorized levelling with dual slope.

Interactive Radio Frequency remote control.

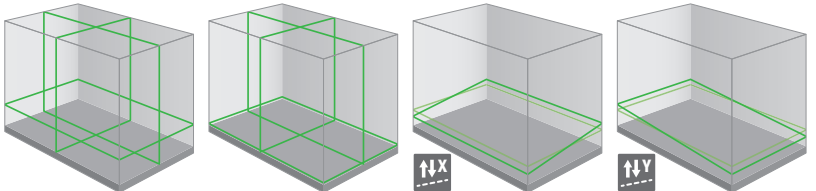

INCLUDED

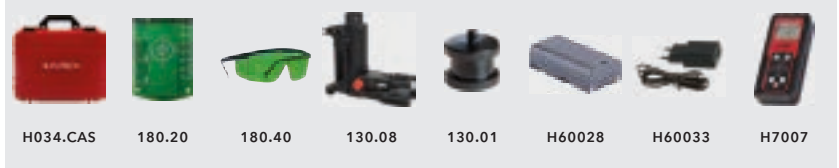

H034.CAS 180.20 180.40 130.08 130.01 H60028 H60033 H7007

MULTICROSS 4D ELECTRONIC

The most comprehensive and user-friendly 4D construction laser.

- 1mm/10m
- Motor
- 2x 60m
- IP54
- 90°
4
- Tilt
- 5°
- 1/4" & 5/8"
- RF
- Manual
- Electronic
- Li-Ion



OVERVIEW 3D/4D LASERS



MULTICROSS 3D
BRAVE



MULTICROSS 3D
FLOOR

NEW



MULTICROSS 3D
COMPACT



MULTICROSS 3D
COMPACT

Visibility				
Accuracy	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m
Range (with receiver)	2x 40m	2x 40m	2x 120m	2x 150m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion or 4x AA	Li-ion	Li-ion
Mains power connection	USB-C	DC Connector	USB-C	USB-C
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	Yes	Yes	Yes	Yes
Number of laser points per line	0	0	0	0
Number of 90° angles on floor and ceiling	4	4	4	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±3°	±3°	±4°	±4°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	Radio frequency	Radio frequency
Built-in screw for tripod	1/4"	1/4"	1/4" (& 5/8")	1/4" (& 5/8")
Laser class	Class 2 - 515nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 520nm - <1mW
	027.3DG € 299,00 € 249,00	028.3FG € 299,00 € 249,00	035.3DR € 299,00 € 259,00	035.3DG € 399,00 € 349,00
	027.3DG-S SET with tripod 160cm and turning table € 329,00 € 299,00	028.3FG-S SET with tripod 160cm € 329,00 € 289,00	035.3DR-P PROMO with tripod 180cm € 348,00 € 299,00	035.3DG-P PROMO with tripod 180cm € 448,00 € 389,00

NEW
EXPECTED
08/2024



MULTICROSS 4D
COMPACT

2mm / 10m
2x 150m
IP54
Li-ion
USB-C
Pendulum levelling
Yes
0
4
10 KHz
No
±4°
Yes
No
No
-
Radio frequency
1/4" (& 5/8")
Class 2 - 520nm - <1mW

035.4DG
~~€ 449,00~~
€ 399,00

035.4DG-P
PROMO
with tripod 180cm
~~€ 498,00~~
€ 439,00



NEW



MULTICROSS 3D
18VMAX

2mm / 10m
2x 120m
IP54
18V Li-ion
USB-C
Pendulum levelling
Yes
0
4
10 KHz
No
±4°
Yes
No
No
-
Radio frequency
1/4" & 5/8"
Class 2 - 505-525nm - <1mW

036.3DG
~~€ 349,00~~
€ 319,00

036.3DG-P
PROMO
with tripod 180cm
~~€ 398,00~~
€ 359,00



MULTICROSS 4D
ELECTRONIC

1mm / 10m
2x 60m
IP45
Li-ion
USB-C
Motorized levelling
Yes
0
4
10 KHz
Yes
±4°
Yes
Yes
No
8,75%
Radio frequency
1/4" (& 5/8")
Class 2 - 515nm - <1mW

034.4DE
~~€ 599,00~~
€ 519,00

034.4DE-P
PROMO
with tripod 180cm
~~€ 648,00~~
€ 559,00



18V MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY

AVAILABLE FOR SEPARATE
PURCHASE WITH THE
MULTICROSS 3D 18VMAX.

COMPATIBLE WITH
BOSCH
H036.BOS
€ 9,00

COMPATIBLE WITH
DEWALT
H036.DEW
€ 9,00

COMPATIBLE WITH
FESTOOL
H036.FES
€ 9,00

COMPATIBLE WITH
HIKOKI
H036.HIK
€ 9,00

COMPATIBLE WITH
MAKITA
H036.MAK
€ 9,00

COMPATIBLE WITH
METABO
H036.MET
€ 9,00

COMPATIBLE WITH
MILWAUKEE
H036.MIL
€ 9,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
028.3FG, 033.05R,
033.05G

H60022 **€ 29,00**

CHARGER / ADAPTER
+ CONNECTION CABLE



Suitable for:
028.3FG, 033.05R,
033.05G

H60024 **€ 29,00**
H60030 **€ 3,50**

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60028 **€ 29,00**

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60033 **€ 29,00**

TURNING TABLE FOR
MULTICROSS 3D BRAVE



Suitable for:
027.3DG

H027.TUR **€ 29,00**

MINI TRIPOD WITH
SHIFTING BASE



Suitable for:
027.3DG, 028.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

130.10 **€ 69,00**

RF REMOTE CONTROL
MULTICROSS 4D




Suitable for:
034.4DE

H7007 **€ 99,00**

JUPITER 2.0 **NEW**

The ideal laser for small jobs



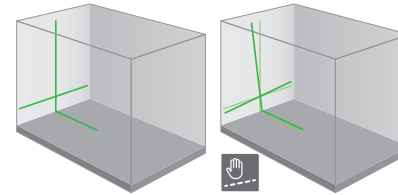

INCLUDED




H009.POU 130.11


SATURN 2.0

The mega visible laser lines and Li-ion battery make this laser very popular among professionals.



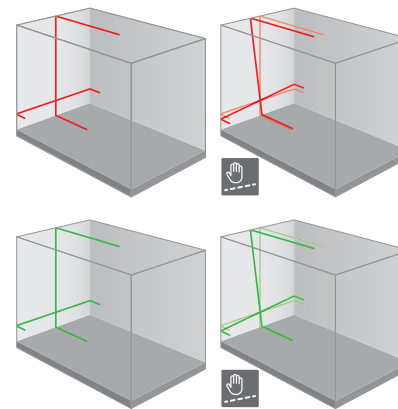



INCLUDED

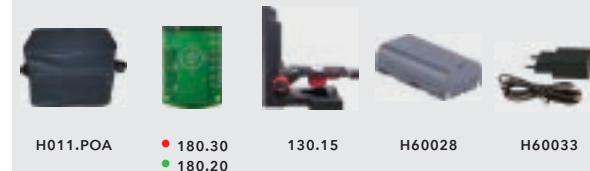

H011.POA • 180.30 130.15 H60028 H60033
 • 180.20











4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.



MULTICROSS 5 SINGLE DOT

Accurately setting out angles is its speciality.

 1,5mm/10m	 Pendulum
 2x 50m	 2x 50m
 IP54	 4
 360°	 5/8"
 Li-Ion	 4x AA



INCLUDED








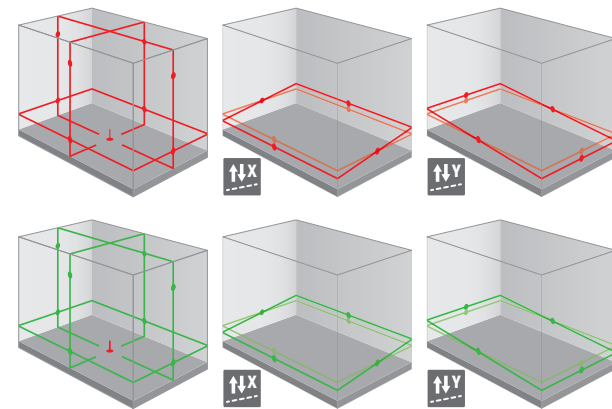
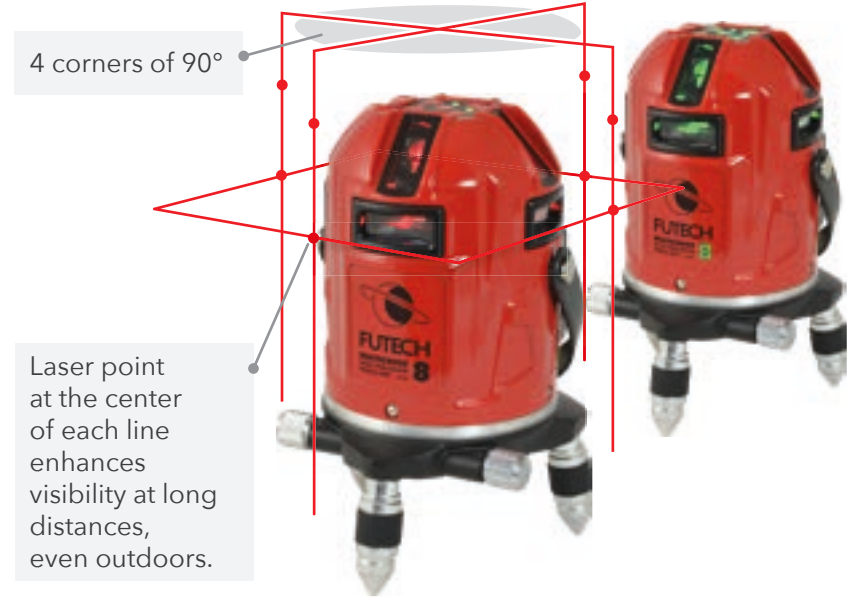
HCASE ● 180.30 ● 180.10 H60024 H30022 H60030 130.07
 ● 180.20 ● 180.40

MULTICROSS 8 HIGH PRECISION SINGLE DOT

The most accurate line laser with 8 laser points that you can also see far outdoors (without a receiver).



 1mm/10m	 Motor
 2x 50m	 2x 50m
 IP54	 4
 5/8"	 360°
 Manual	 Electronic
 Li-Ion	



INCLUDED

					
H052.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H60019	H60023	130.07

Extremely powerful laser lines.


Extremely powerful laser lines.



TILT-security

Remote control with interactive display makes manual, electronic, and digital slope adjustment easy.

Fine adjustment for quick and accurate positioning, even at long distances.

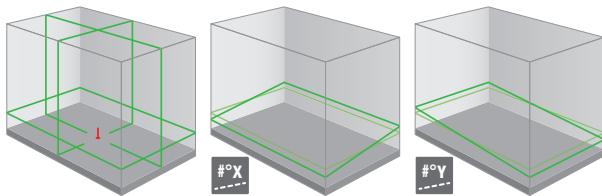

INCLUDED



PROCROSS 8.0 DS

Long distances, slopes in percentage, setting out angles...
Everything you need, with simplicity, both indoors and outdoors.



1mm/10m	Motor
2x 200m	IP66
4	Tilt
360°	5/8"
RF	Manual
Electronic	Digital
Li-Ion	

NEW

OVERVIEW CROSS LINE LASERS



JUPITER 2.0



SATURN 2.0



SATURN 2.0



MULTICROSS 5
SINGLE DOT

Visibility				
Accuracy	3mm / 10m	2mm / 10m	2mm / 10m	1,5mm / 10m
Range (with receiver)	40m	50m	50m	2x 50m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion of 4x AA
Mains power connection	USB-C	USB-C	USB-C	DC Connector
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	No	No	No	Yes
Number of laser points per line	0	0	0	1
Number of 90° angles on floor and ceiling	0	0	0	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±4°	±3,5°	±3,5°	±2°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	No	No
Built-in screw for tripod	1/4"	1/4"	1/4"	5/8"
Laser class	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 635nm - <1mW

009.20G
€ 89,00

009.20G-P
PROMO
with tripod 150cm
~~€ 128,00~~
€ 119,00



011.20R
~~€ 199,00~~
€ 159,00

011.20R-P
PROMO
with tripod 150cm
~~€ 238,00~~
€ 189,00



011.20G
~~€ 219,00~~
€ 199,00

011.20G-P
PROMO
with tripod 150cm
~~€ 258,00~~
€ 229,00



033.05R
~~€ 249,00~~
€ 199,00

033.05R-P
PROMO
with tripod 180cm
~~€ 298,00~~
€ 249,00





MULTICROSS 5
SINGLE DOT



1,5mm / 10m

2x 50m

IP54

Li-ion of 4x AA

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±2°

Yes

No

No

-

No

5/8"

Class 2 - 510-530nm - <1mW

033.05G

~~€ 349,00~~
€ 269,00

033.05G-P

PROMO
with tripod 180cm

~~€ 398,00~~
€ 319,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 660nm - 1mW-<5mW

040.08

~~€ 599,00~~
€ 499,00

040.08-P

PROMO
with tripod 300cm

~~€ 738,00~~
€ 599,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 520nm - 1mW-<5mW

040.08G

~~€ 699,00~~
€ 599,00

040.08G-P

PROMO
with tripod 300cm

~~€ 838,00~~
€ 699,00



PROCROSS 8.0 DS



1mm / 10m

2x 200m

IP66

Li-ion

DC Connector

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 520nm - <1mW

044.80G

~~€ 1299,00~~
€ 999,00

044.80G.4M-P

PROMO
with tripod 300cm
+ Quattro MM

~~€ 1737,00~~
€ 1299,00



ACCESSORIES

LI-ION BATTERY



Suitable for:
028.3FG, 033.05R,
033.05G

H60022

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60028

€ 29,00

LI-ION BATTERY



Suitable for:
040.08, 040.08G

H60023

€ 69,00

LI-ION BATTERY



Suitable for:
044.80G

H60031

€ 149,00

PROCROSS 8.0 DS REMOTE CONTROL



Suitable for:
044.80G

H7006

€ 199,00

CHARGER / ADAPTER



Suitable for:
028.3FG, 033.05R,
033.05G

H60024
H60030

€ 29,00
€ 3,50

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60033

€ 29,00

CHARGER / ADAPTER



Suitable for:
040.08, 040.08G

H60019

€ 25,00

CHARGER / ADAPTER



Suitable for:
044.80G

H60032

€ 39,00

SPINNER


Powerhouse, mainstay, complete and reinvented.



Delivered in a convenient case, with tripod and measuring rod.



1,5mm/10m	Motor
2x 250m	2x 250m
IP54	Z-axis
Tilt	Scan
5/8"	Manual
Electronic	Li-Ion
IR	

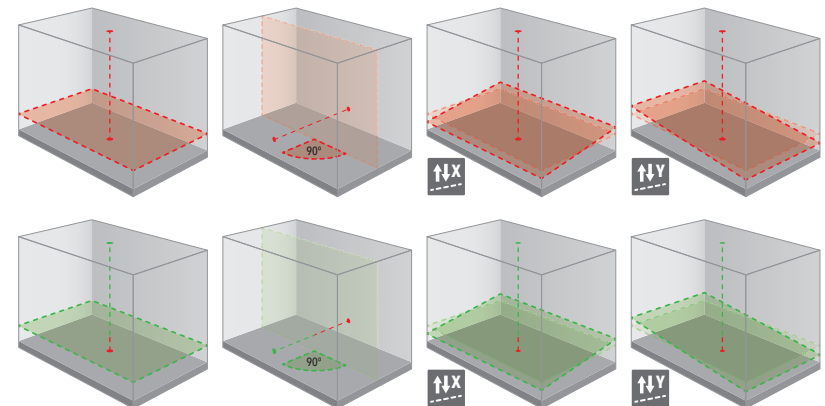

INCLUDED


H052.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H062.CHR	H7002	100.136	140.200



PARA ONE

One button on the device for simplicity.
Remote control for all advanced functions.

The Para One, now also with Z-axis.

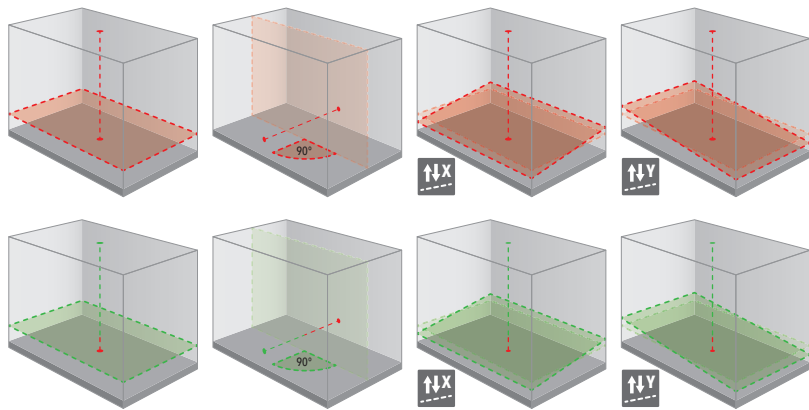

INCLUDED

















1mm/10m	Motor
2x 300m	2x 300m
IP66	Z-axis
Tilt	Scan
Wind	5/8"
Manual	Electronic
Li-Ion	IR




PARA

Everything you can expect from a rotary laser.

-  1mm/10m
-  Motor
-  2x 300m
-  2x 300m
-  IP66
-  Z-axis
-  Tilt
-  Scan
-  Wind
-  5/8"
-  Manual
-  Electronic
-  Li-Ion
-  IR



The Anti-reflection clip prevents unwanted reflections. (included with all Para models.)

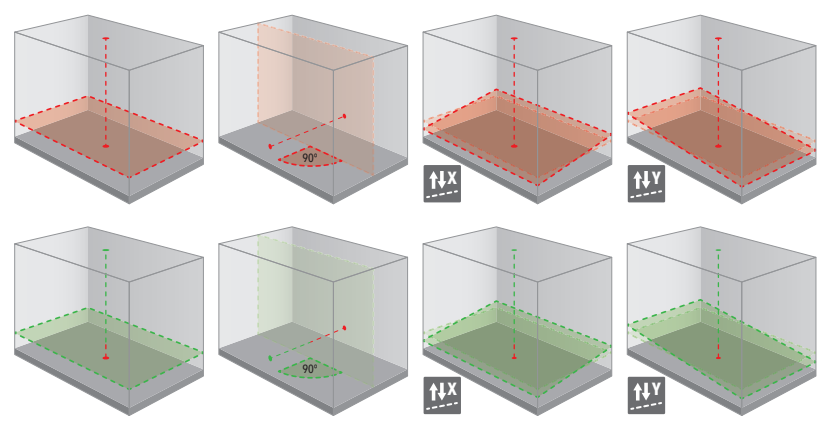


INCLUDED						
						
H052.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H052.CHR	H052.BAT	2X H052.CLI	H7008



PARA DS

Setting slopes in percentages is child's play for this comprehensive rotary laser.

Interactive display on both the remote control and the laser makes all functions easy.

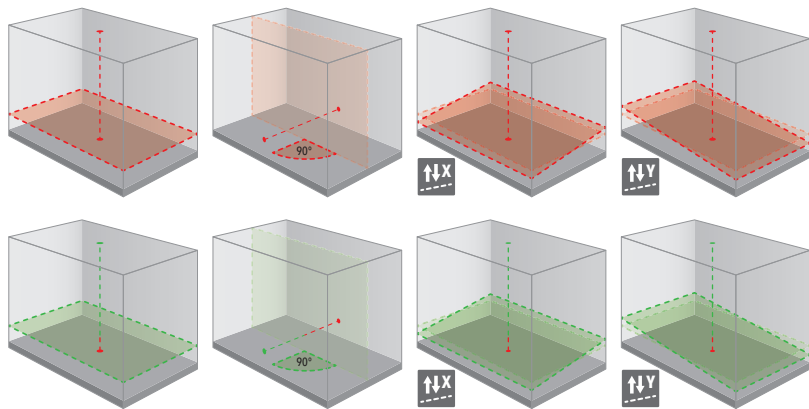

INCLUDED



 1mm/10m	 Motor	 2x 300m
 2x 300m	 IP65	 Z-axis
 Tilt	 Scan	 Wind
 5/8"	 Manual	 Electronic
 Digital	 Li-Ion	 RF

OVERVIEW ROTARY LASERS



SPINNER



SPINNER



PARA ONE



PARA ONE

Visibility				
Accuracy	1,5mm / 10m	1,5mm / 10m	1mm / 10m	1mm / 10m
Range (with receiver)	2x 250m	2x 250m	2x 300m	2x 300m
Dust and waterproofing	IP55	IP55	IP66	IP66
Batteries	Li-ion	Li-ion	Li-ion	Li-ion
AC power connection	DC Connector	DC Connector	USB-C	USB-C
Levelling	Motorized levelling	Motorized levelling	Motorized levelling	Motorized levelling
Plumb bob (Z-axis)	Yes	Yes	Yes	Yes
Rotations per minute	0, 120, 300, 600 RPM	0, 120, 300, 600 RPM	0, 120, 300, 600, 800 RPM	0, 120, 300, 600, 800 RPM
Scanning function	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°
Wind function	No	No	Yes	Yes
Tilt protection	Yes	Yes	Yes	Yes
Self-levelling range	±5°	±5°	±5°	±5°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	Yes	Yes	Yes	Yes
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	±10%	±10%	±10%	±10%
Remote control	Infrared	Infrared	Infrared	Infrared
Built-in screw for tripod	5/8"	5/8"	5/8"	5/8"
Laser class	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW
	062.03R.1E.CS CASE-SET with Gyro Receiver € 618,00 € 599,00	062.03G.1E.CS CASE-SET with Gyro Receiver € 718,00 € 699,00	052.01R.50 with Para Receiver MM € 718,00 € 649,00	052.01G.50 with Para Receiver MM € 818,00 € 749,00
	062.03R.4M.CS CASE-SET with Quattro MM € 798,00 € 779,00	062.03G.4M.CS CASE-SET with Quattro MM € 898,00 € 879,00	052.01R.4M with Quattro MM € 848,00 € 779,00	052.01G.4M with Quattro MM € 948,00 € 879,00



PARA

1mm / 10m
2x 300m
IP66
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
No
±10%
Infrared
5/8"
Class 2 - 635nm - <1mW

052.02R.50
with Para Receiver MM
~~€ 868,00~~
€ 799,00

052.02R.4M
with Quattro MM
~~€ 998,00~~
€ 939,00



PARA

1mm / 10m
2x 300m
IP66
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
No
±10%
Infrared
5/8"
Class 2 - 515nm - <1mW

052.02G.50
with Para Receiver MM
~~€ 968,00~~
€ 899,00

052.02G.4M
with Quattro MM
~~€ 1098,00~~
€ 1039,00



PARA DS

1mm / 10m
2x 300m
IP65
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
Yes
±10%
Radio frequency
5/8"
Class 2 - 635nm - <1mW

052.05R.50
with Para Receiver MM
~~€ 1218,00~~
€ 1149,00

052.05R.4M
with Quattro MM
~~€ 1348,00~~
€ 1289,00



PARA DS

1mm / 10m
2x 300m
IP65
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
Yes
±10%
Radio frequency
5/8"
Class 2 - 515nm - <1mW

052.02G.50
with Para Receiver MM
~~€ 1318,00~~
€ 1249,00

052.05G.4M
with Quattro MM
~~€ 1448,00~~
€ 1389,00

ACCESSORIES

ANTI REFLECTION CLIP



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.CLI

€ 9,00

CHARGER / ADAPTER



Suitable for:
062.03R, 062.03G

H062.CHR

€ 59,00

LI-ION BATTERY



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.BAT

€ 49,00

CHARGER / ADAPTER



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.CHR

€ 59,00

PARA ONE / PARA REMOTE CONTROL



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G

H7008

€ 35,00

PARA DS RF REMOTE CONTROL



Suitable for:
052.05R, 052.05G


H7009

€ 99,00

BUNDLE OFFER

COMPLETE YOUR ROTARY LASER WITH A TRIPOD + MEASURING ROD


TRIPOD 165CM
+ ROD 200CM



100.165-B

~~€ 154,00~~
€ 129,00

TRIPOD 330CM
+ ROD 240CM



110.330-B

~~€ 288,00~~
€ 219,00

RECEIVERS



LINE TRACER R/G



GYRO RECEIVER



GYRO RECEIVER



PARA RECEIVER MM



PARA RECEIVER MM

Suitable for					
Accuracy	2 mm	1 / 2 / 3 mm	1 / 2 / 3 mm	1 / 5 / 10 mm	1 / 5 / 10 mm
Front display	LED	LCD screen	LCD screen	LCD screen + LED	LCD screen + LED
Back display	LED	LCD screen	LCD screen	LCD screen	LCD screen
Distance to laser line (mm)	No	No	No	Yes	Yes
Dust and waterproofing	IP54	IP56	IP56	IP65	IP65
Suitable laser frequency	10 KHz	-	-	-	-
Height of reception field	22 mm	45 mm	45 mm	125 mm	125 mm
Included clamp	H60029	H60009	H60009	H60016	H60016
	150.12.LT	150.10.GS	150.20.GS	152.50R	152.50G
	€ 99,00	€ 119,00	€ 119,00	€ 169,00	€ 169,00

TRIPODS



LIGHT DUTY 150CM

NEW
EXPECTED
10/2024



LIGHT DUTY 160CM



LIGHT DUTY 180CM

NEW
EXPECTED
08/2024



LIGHT DUTY 180CM



LIGHT DUTY 240CM

Range (min. and max. height)	50 - 150 cm	60 - 160 cm	65 - 180 cm	60 - 180 cm	74 - 240 cm
Thread	1/4"	1/4"	5/8"	5/8"	5/8"
Head	Tilting head	Tilting head	Fixed	Fixed	Tilting head
Feet	Rubber	Rubber	Rubber	Rubber	Rubber
Height adjustment	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle
	091.150	092.160	090.180	092.180	092.240
	€ 39,00	€ 39,00	€ 49,00	€ 49,00	€ 99,00



QUATTRO



1 / 2 / 3 mm

LCD screen + LED

LCD screen

No

IP67

7 - 12 KHz

60 mm

H60013

150.40.A

€ 199,00



QUATTRO MM



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

60 mm

H60013

150.40.M

€ 299,00



MAESTRO



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

90 mm

H60013

150.60.R

€ 349,00

MEASURING RODS



TELESCOPIC ROD
400 CM

TELESCOPIC ROD
500 CM

AUTOLOCK ROD
240 CM

AUTOLOCK ROD
350 CM

Range (min. and max. height)

Quick clamp for receiver

Bubble level

120 - 400 cm

120 - 500 cm

87 - 240 cm

191 - 350 cm

No

No

Yes

Yes

Yes

Yes

Yes

Yes

140.400

140.500

140.240.SK

140.350.SK

€ 45,00

€ 49,00

€ 79,00

€ 89,00



MEDIUM DUTY 300CM

75 - 300 cm

5/8"

Fixed

Rubber, Metal pin

Fold-out legs + Spindle

090.300

€ 139,00



ALUMINIUM 165CM

100 - 165 cm

5/8"

Fixed

Metal pin

Fold-out legs

100.165

€ 85,00



ALUMINIUM 3D 165CM

100 - 165 cm

5/8"

Ball head

Metal pin

Fold-out legs

100.165.D

€ 89,00



HEAVY DUTY 330CM

128 - 330 cm

5/8"

Fixed

Rubber, Metal pin

Fold-out legs + Spindle

110.330

€ 209,00



HEAVY DUTY 400CM

170 - 400 cm

5/8"

Fixed

Metal pin

Fold-out legs + Spindle

110.400

€ 279,00



SUPPORT POLE 330CM

170 - 400 cm

1/4" & 5/8"

Fixed

Plastic feet

Infinite height adjust. with clamp

120.330

€ 79,00

ACCESSORIES

WALL MOUNT WITH CLAMP AND MAGNET 1/4"



130.08 € 55,00

WALLCLAMP WITH 3D HEAD 1/4"




130.09 € 19,00

LASER GLASSES



• 180.10 € 15,00
• 180.40 € 15,00

MAGNETIC TARGET PLATE



• 180.30 € 15,00
• 180.20 € 15,00

TARGET STICKER YELLOW



180.50 € 6,00

TRIPOD ADAPTER 1/4"M - 5/8"F



130.01 € 20,00

TRIPOD ADAPTER 5/8"M - 1/4"F



130.06 € 15,00

TRIPOD ADAPTER 5/8"M - 5/8"F



130.07 € 15,00

SLOPE ADAPTER 5/8"



Suitable for:
EVERY LASER WITH
MANUAL SLOPE

115.11 € 129,00

PROMOTION:
WITH PURCHASE OF
A NEW LASER
115.11-P € 95,00



BUNDLE OFFER

COMPLETE YOUR ROTARY LASER WITH A TRIPOD + MEASURING ROD


TRIPOD 165CM + ROD 200CM



100.165-B

~~€ 154,00~~
€ 129,00

TRIPOD 330CM + ROD 240CM

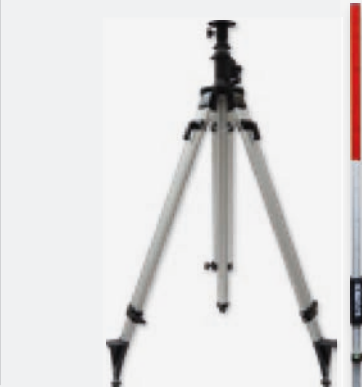

110.330-B

~~€ 288,00~~
€ 219,00

WETPRICKER & HYDRO



WETPRICKER



HYDRO

Measuring depth wood	± 2 mm	20 mm
Measuring depth building materials	± 1 mm	10 mm
Number of wood types	1	8
Number of building material types	1	4
Calibration function	Yes	Yes
Measurement accuracy wood	± 2%	± 1,5%
Measurement accuracy building materials	± 0,1%	0,9% - 1,5%
Maximum moisture	0 - 85% RH	-
Sensor	No	Ultrasonic
Measuring pin	Yes, integrated, replaceable	No
Length of measuring pin	8 mm	-
Measurement range wood	6 - 44%	2 - 65%
Resolution wood	± 1%	± 0,1%
Measurement range building materials	0,2 - 2,1%	0,1 - 35%
Resolution building materials	± 0,05%	± 0,1%
	700.08	195.10
	€ 69,00	€ 199,00



DISTY

Distances, surfaces, angles,...
all no problem for these
laser distance meters



DISTY 40R



DISTY 60G



DISTY 80R



DISTY 120RC

Range	40 m	60 m	80 m	120 m
Number of memory slots	99	99	99	100
Slope indication	Yes	Yes	Yes	Yes
Surface area	Yes	Yes	Yes	Yes
Volume	Yes	Yes	Yes	Yes
Accuracy	±2 mm	2 mm	2 mm	2 mm
Measurements add / subtract	Yes	Yes	Yes	Yes
Continuous measurement (minimum and maximum size)	Yes	Yes	Yes	Yes
Number of Pythagoras functions	4	4	4	5
Simple surface calculation	Yes	Yes	Yes	Yes
Multiple surface calculation	Yes	Yes	Yes	Yes
Painter's function	Yes	Yes	Yes	Yes
Available units	m - inch - ft	m - inch - ft	m - inch - ft	m - inch - ft
Camera	No	No	No	Yes
Zoom	-	-	-	4x
Battery	3x AAA or Li-ion (option)	Li-ion or 3x AAA	Li-ion or 3x AAA	3x AAA or ni-mh (chargeable)
Dust and waterproofing	IP54	IP54	IP54	IP54
	202.40R	202.60G	202.80R	250.120RC
	€ 89,00 € 69,00	€ 159,00 € 119,00	€ 139,00 € 89,00	€ 349,00 € 259,00



ROLLER 2



Range	2 m
Width of measuring blade	12mm
Extra thick measuring blade	No
Nylon coated	No
Locking brake	Yes
Pressure brake	No
501.02	
€ 4,98	

MEASURING WHEEL 2.0

No distance is too far.

Range	9999,9 m
Accuracy	100 mm
Available units	m
Brake	Yes
270.318A	
€ 119,00	



MULTIPOWER



MULTIPOWER 3.6
COMPACT



MULTIPOWER 4.6

Category	Cat. III - 600V
True RMS	Yes
Voltage DC/AC	max. 600V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 4000 counts
Flashlight	LED
Resistance	max. 40 MΩ
Capacity	max. 4000μF
Temperature	-
400.36C	
€ 99,00 € 79,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 6000μF
Temperature	-20°C ~ +760°C
400.46	
€ 189,00 € 159,00	



VOLTTESTER

NEW



VOLTTESTER 4.6A

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	No
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LED
Resolution	12, 24, 50, 120, 400, 690, 1000V
Flashlight	LED
Frequency	40Hz tot 400Hz
420.46A	
€ 89,00	



VOLTTESTER 4.6D

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LCD (3 1/2 digit)
Resolution	1V
Flashlight	LED
Frequency	40Hz tot 400Hz
421.46D	
€ 109,00	



AMPCLAMP



NEW

AMPCLAMP 200



AMPCLAMP 1000

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	200A (AC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 M Ω
Capacity	max. 4000 μ F
Diode test	0.35mA typical, Open circuit <3V DC
Continuity check	$\leq 50\Omega$
Input impedance	10M Ω (VDC & VAC)
Temperature	No
Clamp jaw opening	16 mm
	430.200
	€ 119,00

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	600A (AC/DC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 M Ω
Capacity	max. 100mF
Diode test	0.3mA typical, Open circuit 3.2V DC
Continuity check	$\leq 50\Omega$
Input impedance	10M Ω (VDC & VAC)
Temperature	-20°C ~ 100°C
Clamp jaw opening	35 mm
	431.000
	€ 129,00

VOLTPEN 200-12



Category	Cat. IV - 1000V
True RMS	No
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	No
Range setting	Manually
Display	No
Flashlight	LED
	410.212
	€ 19,50


SIGNALTESTER RJ-F

Multifunctional cable tester with tone generator and cycle test for network cables and video cables.

Cable types	Coax, Cat 7, 7a, 6, 6a, 5, 5a, 4, 3
Shielded / Unshielded	Yes / Yes
Voice	RJ11 / RJ12 (4/6 wires)
Data	RJ45 (8 wires)
Video	Type-F (COAX)
Test	Pass / Fail / Reversed / Shorted / Cross Over / Open / Shield / Split
Wiring tester	Included
Distance ID	5 Video / 5 Data
Signal probe	included
Tone generator	Yes
Maximum length	300m
Maximum resistance	100 Ω (DC)
Minimum length for split pair	0,5m
Voltage warning	Yes
	450.68C
	€ 99,00



TUBECORDER

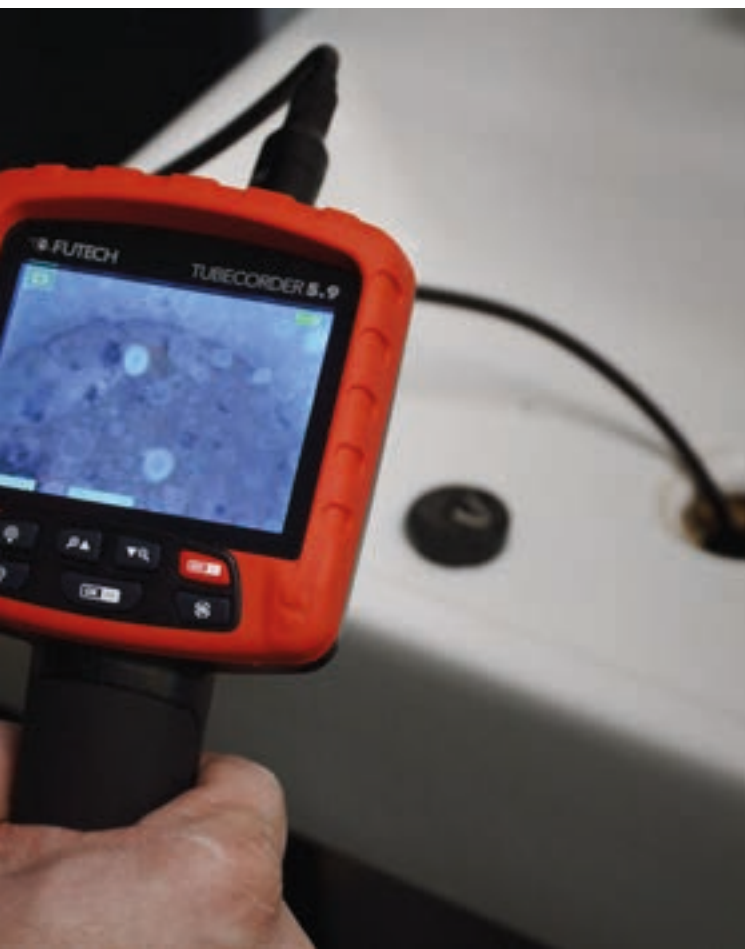

TUBECORDER 5.9

Screen	3,5" TFT
Screen resolution	640 x 480
Camera diameter	9 mm
Camera resolution	
Front camera	Yes
Front camera focus range	5 cm - 15 cm
Viewing angle	
Front object illumination	LED
Side camera	No
Side camera focus range	-
Side object illumination	-
Rotatable camera head	No
Length of flexible tube	5 m
Photo resolution	640 x 480
Photo format	.jpg
Video resolution	640 x 480
Video format	.mp4
TV-out	Yes
Data output	mini-USB / SD-card
SD card included	Yes
635.059	
	€ 299,00 € 249,00

NEWEXPECTED
09/2024TUBECORDER 5.5 HD
DUAL

Screen	5"
Screen resolution	1280 x 720
Camera diameter	5 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	No
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	No
Data output	Micro SD-card
SD card included	Yes
650.552	
	€ 299,00

NEWEXPECTED
09/2024TUBECORDER 5.8 HD
FLEX

Screen	5"
Screen resolution	1280 x 720
Camera diameter	8 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	350°
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	No
Data output	Micro SD-card
SD card included	Yes
651.58F	
	€ 399,00



ACCESSORIES

GOOSENECK 2.9 (2M)



Suitable for:
635.059

690.029

€ 129,00

GOOSENECK 5.9 (5M)



Suitable for:
635.059

690.059

€ 169,00

GOOSENECK 10.9 (10M)



Suitable for:
635.059

690.109

€ 199,00

GOOSENECK 5M X 5.5MM
DUAL **NEW**



Suitable for:
650.552

690.552

€ 129,00

GOOSENECK 10M X 8MM
TRIPLE **NEW**



Suitable for:
650.552

690.1083

€ 149,00

GOOSENECK 5M X 8MM
FLEX **NEW**



Suitable for:
651.58F

691.582F

€ 169,00

GOOSENECK 10M X 8MM
FLEX **NEW**



Suitable for:
651.58F

691.1082F

€ 199,00

TEMPPOINTER




TEMPPOINTER 9

NEW

TEMPPOINTER 9 DEW

Infrared temperature	-50°C - 800°C	-50°C - 800°C
Dew point temperature	No	Yes
Emissivity	0,10 - 1,00	0,10 - 1,00
D:S (distance to spot ratio)	16:1	20:1
Accuracy of infrared	-50°C - 20°C: ± 3,5°C 20 - 300°C: ± 1% 300 - 800°C: ± 1,5%	-50°C - 20°C: ± 3°C 20 - 300°C: ± 1°C 300 - 800°C: ± 2%
Thermocouple temperature	-50°C - 1370°C	-
Accuracy of thermocouple	"-50°C - 0°C: ± 2°C 0 - 1370°C: ± 1,5°C"	-
Spectral response	8 ~ 14 µm	8 ~ 14 µm
Display	LCD	LCD
Display resolution	0,1°C < 1000; 1°C > 1000	0,1°C < 1000; 1°C > 1000
Response time	150 ms	< 100 ms
Operating temperature	0 ~ 50°C	-30°C ~ 100°C
Relative humidity	10% ~ 90%	0% ~ 100%
Laser	Class 2, <1mW, 630-670nm	Class 2, <1mW, 630-670nm
Battery	2x 1,5V AAA	9V
	300.09	310.09D
	€ 99,00 € 79,00	€ 129,00

TEMPVIEWER 10800D

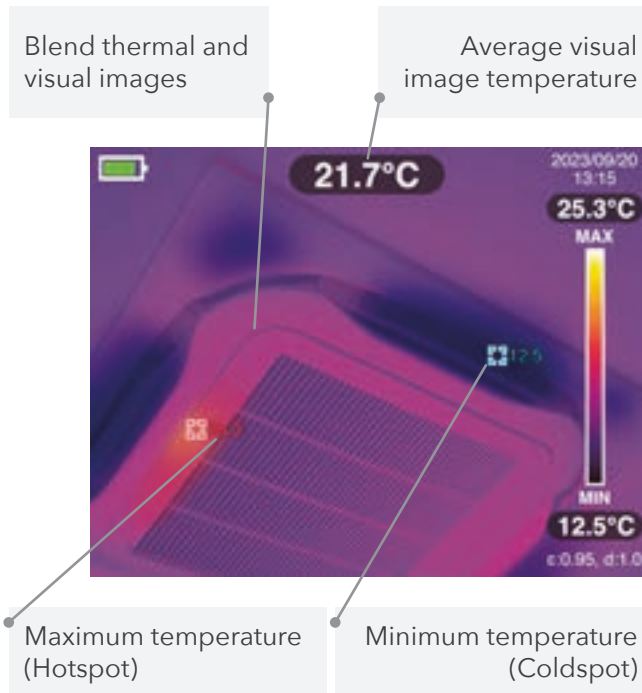

TEMPVIEWER 10800D	
Infrared temperature	-20°C + 400°C
Accuracy of infrared	"-20°C - 0°C: ± 5°C 0°C - 100°C: ± 3°C 100°C - 400°C"
Ambient temperature	0°C ~ 35°C
Emissivity	0,01 - 0,99
Spectral response	8 ~ 14 μm
Display	3,5" Color
Display resolution	320 x 240
Visible light resolution	640 x 480
Response time	-
Operating temperature	-10°C ~ 50°C
Relative humidity	-
Laser	-
Battery	Li-ion
Thermal image pixels	10800 (120x90)
Field of view	50° x 63.4°
Pixel size	17 μm
Output frame rate	≤ 20Hz
Thermal sensitivity	< 60 mK
Measurable distance range	0.5 m ~ 1.2 m
Color palettes	6
High/low temperature indication	Yes
Sensor non-uniformity	< 5%
Storage	Micro SD card (included)
Flashlight	Yes
322.315	
<div style="text-align: right;"> € 799,00 € 699,00 </div>	

MULTISCAN




MULTISCAN

Detection depth for ferrous materials	80 mm
Detection depth for non-ferrous materials	60 mm
Detection depth for live wires	50 mm
Detection depth for wood	20 mm
Graphical indication of detection depth	Yes
196.20	
€ 79,00	
€ 69,00	

DRILL POINTER

NEW

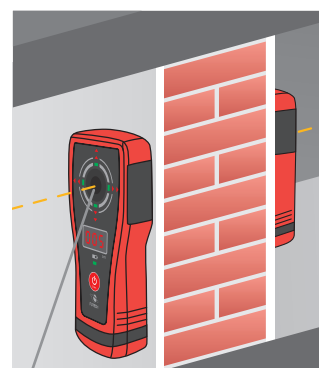

Know where your drill will end, even before you start drilling.



DRILL POINTER

LED indicators (receiver)	13
LED display (receiver)	Yes
Audible signal (receiver)	Yes
Maximum wall thickness	2-150 cm
Wall thickness measurements	2-200 cm
Depth accuracy	± 5%
Wall thickness accuracy	± 3 mm (no reinforcement) ± 10 mm (with reinforcement)
LED indicators (transmitter)	1
LED display (transmitter)	No
Audible signal (transmitter)	No

571.150

~~€ 399,00~~
€ 349,00

571.150-P



PROMO
with Multiscan

~~€ 478,00~~
€ 399,00

EAGLE 32



EAGLE 32

Accuracy	1,0 mm / 1000m
Lens aperture	36mm
Magnification	32x
Self-levelling range	±15'
Horizontal circle	360°
Dust and waterproofing	IP54

072.32

€ 159,00

072.32-P



PROMO
with tripod 165cm
and rod 400cm

~~€ 293,00~~
€ 269,00

DIGITAL LEVEL 20

Digital level



DIGITAL LEVEL 20

Accuracy	0°: 0,5° / rest: 0,1°
Length	20 cm
Dust and waterproofing	IP67
Magnetic	Yes
Resolution	1mm/m
Available units	° (degrees), mm/m, %
Measurement range	4 x 90°
Shock-absorbing end caps	Yes
Rotating display (upside down)	Yes
906D-20	
€ 99,00	

DIGICORNER

Digital angle meter



DIGICORNER

Accuracy	0,1°
Length	26 cm
Magnetic	No
Available units	° (degrees)
Angle indication	digital
Number of memory slots	1
Bubble level	Yes
Bubble level color	yellow/green
992D T-Bevel-30	
€ 69,00	



SINCE 2009

VISIT US
ONLINE FOR
more product information
product comparisons
product videos
user manuals

...



www.futech-tools.com



FIND
THE BEST LASER
FOR YOU!

www.selectlaser.com



Prices are mentioned WITHOUT TAXES (VAT, ...) and valid until 30.09.2024.
Changes in price, shape, execution and potential misprints are reserved. Images used are not strict.
New and/or improved product versions can be launched during the year.

Warranty clauses

FUTECH measuring instruments are made with carefully selected components and manufactured with the utmost care, so that we can offer you products of superior quality. In the unlikely event of your product becoming defective as a result of material or manufacturing faults, you can benefit from a 2 YEAR manufacturer's warranty. During this period, your device will be repaired or replaced free of charge if all of the following conditions are met:

1. Your device was purchased less than 2 years beforehand from an authorised FUTECH distributor. As proof, you attach a copy of the purchase invoice stating the type and serial number of the device to the defective product.
2. You send the defective product to an authorised FUTECH distributor in its original protective packaging (fabric bag, plastic case, etc.).
3. The product does not display damage caused by inappropriate use (e.g. crack(s) due to a fall, internal sand/dirt/water damage, blown or replaced fuses, damage due to use of incorrect charger/adaptor, leaky batteries, attempt to remove or alter the serial number, damage after opening the product, etc.)
4. The product does not show signs of handling or (partial) repair by an unauthorised service centre (e.g. opening of the product, use of non-original parts, etc.).
5. The damage has not been caused by the use of non-original FUTECH accessories.

The manufacturer's warranty does NOT cover periodic maintenance work (e.g. annual fine tuning) or any batteries provided with the unit. The manufacturer's warranty is granted to the first owner of the device as stated on the invoice of the authorised FUTECH distributor. The warranty cannot be transferred to any other party. All repair costs (e.g. transport, parts, labour, etc.) for repairs not covered by the manufacturer's warranty shall be borne in full by the user.



your FUTECH dealer



FOLLOW US ON



FOLLOW US ON



FOLLOW US ON



FOLLOW US ON